

Spectral Synchronization of Multiple Views in $SE(3)$ *

Federica Arrigoni[†], Beatrice Rossi[‡], and Andrea Fusiello[†]

Abstract. This paper addresses the problem of rigid-motion synchronization (a.k.a. motion averaging) in the Special Euclidean Group $SE(3)$, which finds application in structure-from-motion and registration of multiple three-dimensional (3D) point-sets. After relaxing the geometric constraints of rigid motions, we derive a simple closed-form solution based on a spectral decomposition, which is then projected onto $SE(3)$. Our formulation is extremely efficient, as rigid-motion synchronization is cast to an eigenvalue decomposition problem. Robustness to outliers is gained through Iteratively Reweighted Least Squares. Besides providing a theoretically appealing solution, since our method recovers at the same time both rotations and translations, we demonstrate through experimental results that our approach is significantly faster than the state of the art, while providing accurate estimates of rigid motions.

Key words. rigid-motion synchronization, motion averaging, motion registration, spectral decomposition, Iteratively Reweighted Least Squares, structure-from-motion, multiple point-set registration

AMS subject classification. 68T45

DOI. 10.1137/16M1060248

1. Introduction. In this paper we address the *rigid-motion synchronization* problem, which consists of recovering the *absolute orientations* (i.e., position and angular attitude expressed in an absolute coordinate system) of a number of three-dimensional (3D) reference frames, starting from a redundant set of *relative orientations* (i.e., rigid motions of one frame relative to another). Such relative information is usually corrupted by a diffuse noise, in addition to sparse gross errors (outliers).

This problem, also known as *registration* or *averaging*,¹ appears in the context of *structure-from-motion*, where the reference frames are those attached to pinhole cameras, and *multiple point-set registration*, where the goal is to compute rigid motions that bring multiple 3D point-sets into alignment. In both cases reference frames can be also identified with *views*.

1.1. Problem definition. Let us consider a finite simple directed graph $\vec{\mathcal{G}} = (\mathcal{V}, \mathcal{E})$, where vertices correspond to reference frames and edges to the available relative measurements. Both vertices and edges are labeled with rigid motions representing absolute and relative orientations,² respectively. Rigid motions, or *direct isometries*, are elements of the Special Euclidean Group $SE(3)$, which is the semidirect product of the Special Orthogonal Group $SO(3)$ with \mathbb{R}^3 .

*Received by the editors February 5, 2016; accepted for publication (in revised form) September 20, 2016; published electronically November 29, 2016.

<http://www.siam.org/journals/siims/9-4/M106024.html>

[†]DPIA, University of Udine, Udine, Italy (arrigoni.federica@spes.uniud.it, andrea.fusiello@uniud.it).

[‡]AST Lab, STMicroelectronics, Agrate Brianza, Italy (beatrice.rossi@st.com).

¹The term “averaging” in this paper is used in the Computer Vision acception (see, e.g., [13]).

²As is customary in Photogrammetry, the name “orientation” refers to angular attitude *and* position.

As a matrix group, $\text{SE}(3)$ is a subgroup of the General Linear Group $\text{GL}(4)$; thus inverse and composition of rigid motions reduce to matrix operations. Accordingly, each absolute orientation is described by a homogeneous transformation

$$(1.1) \quad M_i = \begin{pmatrix} R_i & \mathbf{t}_i \\ \mathbf{0}^\top & 1 \end{pmatrix} \in \text{SE}(3),$$

where $R_i \in \text{SO}(3)$ and $\mathbf{t}_i \in \mathbb{R}^3$ represent the rotation and translation components of the i th transformation. Similarly, each relative orientation can be expressed as

$$(1.2) \quad M_{ij} = \begin{pmatrix} R_{ij} & \mathbf{t}_{ij} \\ \mathbf{0}^\top & 1 \end{pmatrix} \in \text{SE}(3),$$

where $R_{ij} \in \text{SO}(3)$ and $\mathbf{t}_{ij} \in \mathbb{R}^3$ represent the transformation between frames i and j . The labeling of the edges is such that if $(i, j) \in \mathcal{E}$, then $(j, i) \in \mathcal{E}$ and $M_{ji} = M_{ij}^{-1}$. Hence, without loss of generality (w.l.o.g.), we will consider \mathcal{G} , the undirected version of $\vec{\mathcal{G}}$. The link between absolute and relative orientations is encoded by the *compatibility* constraint

$$(1.3) \quad M_{ij} = M_i M_j^{-1}.$$

The rigid-motion synchronization problem requires computing an estimate of the vertex labels M_i given enough measurements of the ratios $M_i M_j^{-1}$. This is an instance of the more general *synchronization* problem that consists of finding group elements from noisy measurements of their ratios [20, 50], where the group is that of rigid motions. The solution is defined up to a global direct isometry, in the sense that if $M_i \in \text{SE}(3)$ satisfies (1.3) for all i , then also $M_i N$ satisfies (1.3) for any (fixed) $N \in \text{SE}(3)$.

Clearly, a solution exists only if the graph is connected. The minimum number of relative measurements is $|\mathcal{V}| - 1$, which makes \mathcal{G} a tree. In this case every vertex can be labeled with its absolute orientation by simply propagating (1.3) along the tree, starting from the root labeled with the identity. In this case, however, there is no remedy to error propagation: the error affecting a relative measurement propagates down to the leaves of the tree without compensation. In the synchronization problem, instead, the goal is to exploit *redundant* relative measurements in a global fashion to improve the final estimate.

The rigid-motion synchronization problem can be tackled directly in $\text{SE}(3)$, as we propose in this paper, or by breaking the problem into rotation and translation and solving the two subproblems separately, according to the respective compatibility constraints

$$(1.4) \quad R_{ij} = R_i R_j^\top,$$

$$(1.5) \quad \mathbf{t}_{ij} = -R_i R_j^\top \mathbf{t}_j + \mathbf{t}_i.$$

The latter approach is widely adopted in the structure-from-motion literature, since relative translations are only known as *directions*, i.e., the magnitude is unknown; thus relative measurements cannot be properly represented as elements of $\text{SE}(3)$. A wide overview of existing solutions is provided in the next section.

1.2. Broader context and related work. The rigid-motion synchronization problem has a wide range of applications in Computer Vision, including structure-from-motion and multiple point-set registration. In both cases the relative orientations can be estimated through standard techniques; thus the problem is to average them in a consistent manner in order to recover the absolute orientations. In the structure-from-motion case, given a set of matching points between two images, the relative motion (up to scale) between the views can be recovered by first estimating the essential matrix and then computing its singular value decomposition [28]. In the case of 3D registration, the relative orientation between two point-sets is commonly computed through the Iterative Closest Point Algorithm [11], which alternates the correspondence step—in which each point is matched with its closest neighbor under the current transformation—with the orientation step—in which the rotation and translation that align the points in a common reference frame are computed by solving an absolute orientation problem. Other applications of rigid-motion synchronization include sensor network localization [15], cryo-electron microscopy [51], and simultaneous localization and mapping (SLAM) [46].

In the literature on multiple point-set registration, the origins of rigid-motion synchronization can be traced back to the *frame space* methods [19, 48] that optimize the internal coherence of the network of rotations and translations applied to the local coordinate frames, as opposed to solutions that optimize a cost function depending on the distance between corresponding points (e.g., [43, 9, 44, 55]).

In the structure-from-motion literature, *global* methods, which first solve for the motion by optimizing the network of relative orientations and leave the 3D structure recovery at the end, are fairly recent (e.g., [36]), although the origins of these approaches can be traced back to [22]. The majority of global techniques do not address rigid-motion synchronization as such but break the problem into rotation and translation and solve the two problems separately.

Regarding *rotation synchronization*, a theoretical analysis of the problem is reported in [27]. The absolute rotations can be recovered by using the quaternion representation of $SO(3)$, as done in [22, 19], or by distributing the error over cycles in the graph of neighboring views [48]. In [36] the problem is cast as the optimization of an objective function based on the ℓ_2 -norm of the compatibility error between relative estimates and unknown absolute rotations, and this approach is extended in [50, 3], where approximate solutions are computed either via spectral decomposition (EIG) or semidefinite programming (SDP). Recent works on rotation synchronization [26, 62, 13, 6] focus on introducing robustness to outliers directly in the cost function. In [26] a cost based on the ℓ_1 -norm is used to average relative rotations, where each absolute rotation is updated in turn using the Weiszfeld algorithm. The sum of unsquared deviations is proposed in [62] as a more robust consistency error. Chatterjee and Govindu in [13] exploit the Lie-group structure of rotations and develop an L1-IRLS algorithm by combining ℓ_1 -averaging in the tangent space with Iteratively Reweighted Least Squares (IRLS). In [6] the rotation synchronization problem is reformulated in terms of “low-rank and sparse” matrix decomposition, and an efficient algorithm—called R-GODEC—is developed to compute such decomposition. Alternatively, robustness can be achieved by removing outliers before performing rotation synchronization [65, 17, 40, 7].

As for *translation recovery* methods, a discriminating factor relevant to our analysis is whether they work in frame-space (e.g., [22, 12, 42, 41, 38, 32]) or whether they leverage

on point correspondences as well (e.g., [35, 33, 14, 64]). Only the former fit the general statement of the rigid-motion synchronization problem, which is agnostic on the data that generated relative orientation measurements. In [22] absolute translations are computed as the least squares solution of a linear system of equations involving relative orientations, while in [12] a fast spectral solution to translation recovery is proposed by reformulating the problem in terms of graph embedding. The authors of [42] first compute relative directions through a robust subspace estimation and then derive absolute translations using a semidefinite relaxation (SDR). The method presented in [41] is based on a least unsquared deviations (LUD) formulation, which gives rise to a convex program robust to outlier directions. In [38] relative directions are computed through an a contrario trifocal tensor estimation, and then absolute translations are recovered by using an ℓ_∞ formulation. In [32] a linear solution which minimizes a geometric error in triplets of views is presented, and such an approach is extended in [16] by considering feature tracks. All of these techniques recover absolute translations from pairwise directions $\mathbf{t}_{ij}/\|\mathbf{t}_{ij}\|$; i.e., they solve a *bearing-only localization* problem [66]. Theoretical conditions under which the solution is unique (up to a global translation and scale) are more complex than the cases of rotation and rigid-motion synchronization—where the measurement graph is simply required to be connected—and they refer to the concept of *parallel rigidity* [42, 63].

A different approach for rigid-motion synchronization is followed in [23, 57, 46], where rotations and translations are *jointly* considered as elements of $\text{SE}(3)$. Govindu in [23] exploits the Lie-group structure of $\text{SE}(3)$ and uses an iterative scheme in which at each step the absolute orientations are approximated by averaging relative orientations in the tangent space. In [24] robustness is added to the original technique through random sampling in the measurement graph. Originally proposed in the structure-from-motion framework, the same technique was also applied to multiple point-set registration [25] and simultaneous localization and mapping [2]. The authors of [57] represent rigid motions as dual quaternions and propose a graph diffusion algorithm where each absolute orientation is updated in turn through linear or geodesic averaging. In [46] a geometric error is adopted and the rigid motion constraints are relaxed by considering the convex hull of $\text{SE}(3)$, which has a semidefinite representation [47]. This results in a convex cost function which is (globally) minimized through the interior-point method. Such a solution is then improved by (locally) minimizing the objective function over $\text{SE}(3)$ through the Levenberg–Marquardt algorithm.

A related approach is adopted in [59, 60], where rotations and translations are initialized separately and then jointly refined through Riemannian gradient descent. In [60] the scales of relative translations are forced to be positive—hence this method is referred to as constrained least squares (CLS)—while in [59] nonisotropic noise and incomplete relative orientations are taken into account through the use of covariance matrices.

Other techniques [39, 18, 45] compute both rotations and translations at the same time by minimizing an objective function involving point correspondences. At the intersection between frame-based and point-based methods is the formulation in [49] where 3D points are used to compute a second-order approximation of the cost function, but they are not involved in subsequent computations.

1.3. Our contribution. In this paper we propose a novel method for rigid-motion synchronization in $\text{SE}(3)$. After relaxing the geometric constraints of rigid motions, we derive a closed-form solution—based on a spectral decomposition—which is then projected onto $\text{SE}(3)$. This can be regarded as an “extrinsic calculation,” for the rigid motion constraints are relaxed to compute the solution, as in [61, 46]. This approach is extremely efficient, as rigid-motion synchronization is cast to an eigenvalue decomposition of a $4|\mathcal{V}| \times 4|\mathcal{V}|$ matrix.

Our method can be seen as the extension to $\text{SE}(3)$ of the spectral synchronization proposed in [50] for $\text{SO}(2)$ and generalized to $\text{SO}(3)$ in [51, 3]. Thanks to the introduction of weights, this simple matrix formulation naturally copes with missing measures, and it can be embedded into an IRLS scheme in order to handle rogue measurements. The same idea also appeared in [10] in the context of shape alignment, though without considering missing relative orientations and outliers. Further theoretical analysis is reported in [54], where the authors address the synchronization problem over the General Linear Group $\text{GL}(N)$. They describe a (theoretical) drawback of our approach applied to $\text{GL}(N)$ and propose a new formulation that overcomes it. That counterexample, however, does not work in $\text{SE}(3)$, and simulations reported in [54] show that in a realistic scenario (low dimension and many reference frames) the differences between the two methods are negligible.

An exhaustive set of experiments on synthetic and real data shows that our method compares favorably with the state of the art in terms of accuracy, and it is the fastest solution among all the analyzed techniques.

This paper is organized as follows. Section 2 describes our spectral solution to rigid-motion synchronization in $\text{SE}(3)$. In section 3 our method is compared to state-of-the-art algorithms developed both in the context of structure-from-motion and 3D registration. The conclusions are presented in section 4.

2. Our method. In this section we introduce our approach for solving the rigid-motion synchronization problem in $\text{SE}(3)$. In section 2.1 we describe properties that hold when all of the relative information is exact and that are necessary to define our technique. Then we derive our spectral solution to rigid-motion synchronization (section 2.2). In section 2.3 our method is embedded into an IRLS framework in order to handle outliers among relative orientations. Finally, section 2.4 briefly presents the extension of our method to $\text{SE}(N)$.

2.1. The exact case. The absolute orientations can be recovered from (1.3)—up to a global rigid motion—if we express it in a useful equivalent way that takes into account all of the relative information at once. For simplicity of exposition, we first consider the case where all the pairwise measures are available.

Let $X \in \mathbb{R}^{4n \times 4n}$ denote the block-matrix containing the ideal (noise free) relative orientations, and let $M \in \mathbb{R}^{4n \times 4}$ be the stack of absolute orientations, namely

$$(2.1) \quad M = \begin{bmatrix} M_1 \\ M_2 \\ \dots \\ M_n \end{bmatrix}, \quad X = \begin{pmatrix} I_4 & M_{12} & \dots & M_{1n} \\ M_{21} & I_4 & \dots & M_{2n} \\ \dots & \dots & \dots & \dots \\ M_{n1} & M_{n2} & \dots & I_4 \end{pmatrix},$$

where I_4 indicates the 4×4 identity matrix and $n = |\mathcal{V}|$. If $M^{-b} \in \mathbb{R}^{4 \times 4n}$ denotes the concatenation by rows of the inverse of absolute orientations, i.e., $M^{-b} = [M_1^{-1} \ M_2^{-1} \ \dots \ M_n^{-1}]$,

then the compatibility constraint turns into

$$(2.2) \quad X = MM^{-b},$$

and hence $\text{rank}(X) = 4$. Note that here X is not symmetric positive semidefinite, in contrast to the case of $\text{SO}(3)$. Since $M^{-b}M = nI_4$, we obtain

$$(2.3) \quad XM = nM,$$

which means that—in the absence of noise—the columns of M are 4 (independent) eigenvectors of X associated to the eigenvalue n . Note that, since X has rank 4, all the other eigenvalues are zero; thus n is also the largest eigenvalue of X . Equation (2.3) is equivalent to

$$(2.4) \quad (nI_{4n} - X)M = 0;$$

thus the columns of M form a basis for the four-dimensional null-space of $L = (nI_{4n} - X)$.

Conversely, any basis U for $\text{null}(L)$ will not coincide with M in general, since it will not be composed of rigid motions. Specifically, it will not coincide with $[0 \ 0 \ 0 \ 1]$ in every fourth row. In order to recover M from U it is sufficient to choose a different basis for $\text{null}(L)$ that satisfies such a constraint, which can be found by taking a suitable linear combination of the columns of U . More precisely, let $B \in \mathbb{R}^{n \times 4n}$ be the 0/1-matrix such that $BU \in \mathbb{R}^{n \times 4}$ consists of the rows of U with indices a multiple of four. The coefficients $\alpha, \beta \in \mathbb{R}^4$ of the linear combination are the solution of

$$(2.5) \quad BU\alpha = 0, \quad BU\beta = 1,$$

where the first equation has a 3D solution space. Let $\alpha_1, \alpha_2, \alpha_3$ be a basis for the null-space of BU . Thus the columns of M corresponding to rotations coincide (up to a permutation) with $[U\alpha_1, U\alpha_2, U\alpha_3]$, and M is recovered as $M = U[\alpha_1, \alpha_2, \alpha_3, \beta]$. Note that this postprocessing on the eigenvectors is not required for the spectral method in $\text{SO}(3)$ [3], since any orthogonal basis for the null-space of L coincides (up to a permutation) with the stack of the absolute rotations.

Dealing with missing data. We now consider the case of missing data, in which the graph \mathcal{G} is connected but not complete. Let $A \in \mathbb{R}^{n \times n}$ be the adjacency matrix of \mathcal{G} , i.e., the symmetric matrix such that $A_{ij} = 1$ if $(i, j) \in \mathcal{E}$ and $A_{ij} = 0$ otherwise, and let $D \in \mathbb{R}^{n \times n}$ be the degree matrix of \mathcal{G} , i.e., the diagonal matrix such that $D_{ii} = \sum_j A_{ij}$ (D_{ii} contains the degree of node i).

In this situation missing pairwise measures correspond to zero blocks in X ; i.e., the available relative information is represented by $(A \otimes \mathbb{1}_{4 \times 4}) \circ X$, where \otimes denotes the Kronecker product and \circ denotes the Hadamard product. The adjacency matrix A gets “inflated” to a 4×4 -block structure by the Kronecker product with $\mathbb{1}_{4 \times 4}$ (a matrix filled by ones), to match the block structure of X . Being a matrix of 0/1, the effect of its entrywise product with X is to zero the unspecified blocks of X and leave the others unchanged.

It can be seen that (2.3) generalizes to

$$(2.6) \quad ((A \otimes \mathbb{1}_{4 \times 4}) \circ X)M = (D \otimes I_4)M.$$

Indeed, the i th block-row in (2.6) is

$$(2.7) \quad \sum_{j \text{ s.t. } (i,j) \in \mathcal{E}} M_{ij} M_j = D_{ii} M_i,$$

which is true since $M_{ij} = M_i M_j^{-1}$. Therefore, the columns of M are four (independent) eigenvectors of

$$(2.8) \quad P = (D \otimes I_4)^{-1}((A \otimes \mathbb{1}_{4 \times 4}) \circ X)$$

associated to the eigenvalue 1. Note that the incomplete data matrix $(A \otimes \mathbb{1}_{4 \times 4}) \circ X$ will have full rank in general; thus 1 is not the unique nonzero eigenvalue of P , in contrast to the case of (2.3). However, it can be shown that 1 is the largest eigenvalue of P .

Proposition 2.1. *The matrix P defined in (2.8) has real eigenvalues. The largest eigenvalue is 1 and it has multiplicity 4.*

Proof. By substituting the compatibility constraint (2.2) into the definition of P we get

$$(2.9) \quad P = (D \otimes I_4)^{-1}((A \otimes \mathbb{1}_{4 \times 4}) \circ (MM^{-b})).$$

It easy to observe that

$$(2.10) \quad P = (D \otimes I_4)^{-1} \text{bdiag}(M)(A \otimes I_4) \text{bdiag}(M)^{-1},$$

where $\text{bdiag}(M)$ produces a $4n \times 4n$ block-diagonal matrix with 4×4 blocks M_1, \dots, M_n along the diagonal. Indeed, the (i, j) th block in $(A \otimes \mathbb{1}_{4 \times 4}) \circ (MM^{-b})$ is

$$(2.11) \quad \begin{cases} \mathbb{1}_{4 \times 4} \circ (M_i M_j^{-1}) & \text{if } (i, j) \in \mathcal{E}, \\ 0 & \text{if } (i, j) \notin \mathcal{E}, \end{cases}$$

while the (i, j) th block in $\text{bdiag}(M)(A \otimes I_4) \text{bdiag}(M)^{-1}$ is

$$(2.12) \quad \begin{cases} M_i I_4 M_j^{-1} & \text{if } (i, j) \in \mathcal{E}, \\ 0 & \text{if } (i, j) \notin \mathcal{E}. \end{cases}$$

Moreover, we observe that the diagonal matrix $(D \otimes I_4)^{-1}$ commutes with $\text{bdiag}(M)$, since each 4×4 block along its diagonal is a multiple of the identity matrix. Thus we obtain

$$(2.13) \quad P = \text{bdiag}(M)(D \otimes I_4)^{-1}(A \otimes I_4) \text{bdiag}(M)^{-1}$$

$$(2.14) \quad = \text{bdiag}(M)((D^{-1}A) \otimes I_4) \text{bdiag}(M)^{-1},$$

which means that the matrix P defined in (2.8) is similar to the matrix $(D^{-1}A) \otimes I_4$; i.e., they have the same eigenvalues. Thus the thesis reduces to analyzing the eigenvalues of $(D^{-1}A) \otimes I_4$. The matrix $D^{-1}A$, a.k.a. the *transition matrix* of the graph \mathcal{G} , has real eigenvalues since it is similar to the symmetric matrix $N = D^{-1/2}AD^{1/2}$. It follows from the Perron–Frobenius theorem [37] that the largest eigenvalue of $D^{-1}A$ is 1 and it has multiplicity 1, assuming that \mathcal{G} is connected. Since the eigenvalues of the Kronecker product of two matrices are the product of the eigenvalues of the matrices, we conclude that the largest eigenvalue of $(D^{-1}A) \otimes I_4$ is 1 and it has a multiplicity of 4. ■

The proof of Proposition 2.1 has pointed out that—provided that X is decomposable as $X = MM^{-b}$ —the matrix P has a particular structure that yields real eigenvalues, although it is not symmetric. In particular, the eigenvalues of P do not depend on the measured data, i.e., the relative orientations, but they depend *only* on the structure of the measurement graph \mathcal{G} (through the matrices D and A).

We now show that (2.6) can also be expressed as a null-space problem. Let us rewrite it as

$$(2.15) \quad ((D \otimes I_4) - (A \otimes \mathbb{1}_{4 \times 4}) \circ X)M = 0,$$

which generalizes (2.4). In fact, if \mathcal{G} is complete, then $D = (n-1)I_n$ and $A = \mathbb{1}_{n \times n} - I_n$; hence we get (2.4). Thus the columns of M belong to the null-space of

$$(2.16) \quad L = (D \otimes I_4) - (A \otimes \mathbb{1}_{4 \times 4}) \circ X.$$

It can be shown that such a null-space is four-dimensional, as happens in the case of a complete graph. Before doing that, let us observe that the matrix $D \otimes I_4$ coincides with $(D \otimes \mathbb{1}_{4 \times 4}) \circ X$, since X has identity blocks along its diagonal and $D \otimes \mathbb{1}_{4 \times 4}$ is block-diagonal. By using the distributive property of the involved products, we obtain an equivalent expression for L ,

$$(2.17) \quad L = ((D - A) \otimes \mathbb{1}_{4 \times 4}) \circ X,$$

where the matrix $(D - A)$ (a.k.a. the *Laplacian* matrix of the graph \mathcal{G}) gets “inflated” to a 4×4 -block structure by the Kronecker product with $\mathbb{1}_{4 \times 4}$, to match the block structure of X .

Proposition 2.2. *The matrix L defined in (2.17) has a four-dimensional null-space.*

Proof. By using the compatibility constraint (2.2), we can express L as

$$(2.18) \quad L = ((D - A) \otimes \mathbb{1}_{4 \times 4}) \circ (MM^{-b}).$$

It can be easily verified that

$$(2.19) \quad L = \text{bdiag}(M)((D - A) \otimes I_4)\text{bdiag}(M)^{-1},$$

which means that the matrix L defined in (2.17) is similar to the matrix $(D - A) \otimes I_4$; thus they have the same rank. The matrix $D - A$, a.k.a. the *Laplacian matrix* of the graph \mathcal{G} , has rank $n - 1$ assuming that \mathcal{G} is connected. Since the rank of the Kronecker product of two matrices is the product of the rank of the matrices, we obtain

$$(2.20) \quad \text{rank}(L) = \text{rank}(D - A) \text{rank}(I_4) = 4n - 4,$$

which implies that the null-space of L is four-dimensional. ■

Please note that in practice one cannot measure L from (2.17), because the full X is not available; in fact only the product $(A \otimes \mathbb{1}_{4 \times 4}) \circ X$ is available. Therefore, in practice L will be derived from (2.16).

Weighted graph. In some applications we are given nonnegative weights w_{ij} that reflect the reliability of the pairwise measurements. In other words, \mathcal{G} is a weighted graph with real weights, stored in the symmetric adjacency matrix $A = [w_{ij}]$. Accordingly, the degree matrix D of the weighted graph is defined as $D_{ii} = \sum_j w_{ij}$. Equations (2.6) and (2.15) still hold with these definitions; thus our spectral method extends straightforwardly to *weighted* rigid-motion synchronization.

2.2. Dealing with noise. We now consider the case where the relative measures are corrupted by noise; hence they do not satisfy (1.3) and (2.15) exactly. Thus the goal is to recover the absolute orientations such that they are “maximally compatible” with the available relative information.

Let $\widehat{M}_{ij} \in \text{SE}(3)$ denote an estimate of the theoretical relative orientation $M_{ij} \in \text{SE}(3)$. Hereafter, we will consistently use the hat accent to denote noisy measurements. Rigid-motion synchronization can be formalized as the problem of minimizing the (weighted) residuals of the compatibility constraint (1.3), namely

$$(2.21) \quad \min_{M_i \in \text{SE}(3)} \sum_{(i,j)} w_{ij} \left\| \widehat{M}_{ij} - M_i M_j^{-1} \right\|_F^2,$$

where the Frobenius norm $\|\cdot\|$ defines a left-invariant metric on $\text{SE}(3)$, or, more generally, as the problem of minimizing the following geometric error:

$$(2.22) \quad \min_{R_i \in \text{SO}(3), \mathbf{t}_i \in \mathbb{R}^3} \sum_{(i,j)} \alpha_{ij} \left\| \widehat{R}_{ij} - R_i R_j^\top \right\|_F^2 + \beta_{ij} \left\| \widehat{\mathbf{t}}_{ij} - \mathbf{t}_i + R_i R_j^\top \mathbf{t}_j \right\|_2^2,$$

where $\alpha_{ij}, \beta_{ij} \geq 0$. Note that this is a nonconvex optimization problem that needs to be solved iteratively through, e.g., the Levenberg–Marquardt algorithm. Since convergence to a global minimum is not guaranteed, current research puts effort into formulating tractable approaches that solve the problem approximately but accurately, so as to provide a good starting point for a local refinement.

In this spirit, we consider an algebraic cost function that measures the residuals (in the Frobenius norm sense) of (2.15), namely

$$(2.23) \quad \min_{M \in \text{SE}(3)^n} \left\| \widehat{L} M \right\|_F^2,$$

where $\widehat{L} = (D \otimes I_4) - (A \otimes \mathbb{1}_{4 \times 4}) \circ \widehat{X}$, and \widehat{X} denotes a noisy version of the ideal matrix X , which contains the measured relative orientations $\widehat{M}_{ij} \in \text{SE}(3)$. By using (2.7) and expressing the squared Frobenius norm in (2.23) as the sum of the squared Frobenius norm over each 4×4 block, we get that such a problem coincides with

$$(2.24) \quad \begin{aligned} & \min_{M_i \in \text{SE}(3)} \sum_{i=1}^n \left\| \sum_{j=1}^n w_{ij} (\widehat{M}_{ij} M_j - M_i) \right\|_F^2 \\ &= \min_{\substack{R_i \in \text{SO}(3) \\ \mathbf{t}_i \in \mathbb{R}^3}} \sum_{i=1}^n \left\| \sum_{j=1}^n w_{ij} (\widehat{R}_{ij} R_j - R_i) \right\|_F^2 + \sum_{i=1}^n \left\| \sum_{j=1}^n w_{ij} (\widehat{\mathbf{t}}_{ij} - \mathbf{t}_i + \widehat{R}_{ij} \mathbf{t}_j) \right\|_2^2. \end{aligned}$$

For each node, this cost function considers the edges incident to that node, sums the (weighted) residuals of the compatibility constraints, and takes the squared Frobenius norm. These norms are then summed up over all the nodes.

Problem (2.23) is difficult to solve since the feasible set $\text{SE}(3)^n = \text{SE}(3) \times \cdots \times \text{SE}(3)$ is nonconvex. In order to make the computation tractable, we do not solve problem (2.23) directly, but we proceed as follows. First, we look for an orthogonal basis for the (approximated) four-dimensional null-space of \hat{L} by solving the following optimization problem:

$$(2.25) \quad \min_{U^T U = nI_4} \left\| \hat{L}U \right\|_F^2,$$

where we use U instead of M to underline that we are looking for the subspace spanned by the columns of M , instead of M itself. In other words, we solve the homogeneous system of equations $\hat{L}U = \mathbf{0}$ in the least-squares sense. Within this space, we find the solution that is closest to having every fourth row equal to $[0 \ 0 \ 0 \ 1]$ by solving system (2.5) in the least-squares sense. Then, such a solution is projected onto $\text{SE}(3)^n$ —as in [8]—by forcing every fourth row to $[0 \ 0 \ 0 \ 1]$ and projecting 3×3 rotation blocks onto $\text{SO}(3)$ through Singular Value Decomposition (SVD) [61].

Proposition 2.3. *Problem (2.25) admits a closed-form solution, which is given by the four eigenvectors of $\hat{L}^T \hat{L}$ associated to the four smallest eigenvalues.*

Proof. We first observe that problem (2.25) coincides with

$$(2.26) \quad \min_{U^T U = nI_4} \text{trace}(U^T (\hat{L}^T \hat{L}) U).$$

Let \mathcal{F} be the unconstrained cost function corresponding to this problem, namely

$$(2.27) \quad \mathcal{F}(U) = \text{trace}(U^T (\hat{L}^T \hat{L}) U) + \text{trace}(\Lambda(U^T U - nI_4)),$$

where $\Lambda \in \mathbb{R}^{4 \times 4}$ is a symmetric matrix of unknown Lagrange multipliers. Setting to zero the partial derivatives of \mathcal{F} with respect to U , we obtain

$$(2.28) \quad \frac{\partial \mathcal{F}}{\partial U} = 2(\hat{L}^T \hat{L})U + 2U\Lambda = 0 \Rightarrow (\hat{L}^T \hat{L})U = -U\Lambda.$$

Let \mathbf{u}_i be any four eigenvectors of $\hat{L}^T \hat{L}$ (normalized so that $\|\mathbf{u}_i\| = \sqrt{n}$), and let λ_i be the corresponding eigenvalues. Then $U = [\mathbf{u}_1 | \mathbf{u}_2 | \mathbf{u}_3 | \mathbf{u}_4]$ satisfies both (2.28) and the constraint $U^T U = nI_4$, with $\Lambda = -\text{diag}(\lambda_1, \lambda_2, \lambda_3, \lambda_4)$ (indeed $\hat{L}^T \hat{L}$ admits an orthonormal basis of real eigenvectors since it is symmetric). In other words, any quadruple of eigenvectors is a stationary point for the objective function \mathcal{F} . The minimum is attained in (2.26) if \mathbf{u}_i are the four least eigenvectors of $\hat{L}^T \hat{L}$. ■

It follows from Proposition 2.3 that problem (2.25) can be equivalently solved by computing the least four right singular vectors of \hat{L} . It should be noted that in all practical scenarios the measurements graph \mathcal{G} is sparse, for pairwise measurements are typically available only for a small number of neighboring views; hence the number of edges is linear in the number of nodes. However, while \hat{L} inherits the sparsity of \mathcal{G} , this does not necessarily imply that $\hat{L}^T \hat{L}$

will be comparably sparse. Indeed, if A has a full row, then $\hat{L}^\top \hat{L}$ is full. Hence the singular vector solution has to be preferred if a sparsity-aware algorithm is used.

Note that our method produces an *extrinsic estimate*, for it provides a closed-form solution to problem (2.25), which is a relaxed version of problem (2.23), and this solution is then projected onto the manifold of rigid motions. The idea of relaxing rigid-motion constraints is also present in [46], where the feasible set $\text{SE}(3)^n$ is relaxed to its convex hull. The authors of [46] minimize a geometric error tightly related to (2.22), resulting in an iterative scheme. This leads to a more accurate solution than our approach, which is based on an algebraic error, but it requires a significant amount of time, while our solution is fast and direct—as confirmed by the simulations.

Alternatively, we can consider the equivalent formulation (2.6) and compute the four top eigenvectors of

$$(2.29) \quad \hat{P} = (D \otimes I_4)^{-1}((A \otimes \mathbb{1}_{4 \times 4}) \circ \hat{X}),$$

where the matrix $D \otimes I_4$ is easy to invert since it is diagonal. Note that \hat{P} inherits the sparsity of \mathcal{G} . In the presence of noise that cripples the structure of P (i.e., $\hat{X} \neq MM^{-b}$) the eigenvalues and the eigenvectors will be complex in general. As a consequence, after computing the linear combination that yields $[0 \ 0 \ 0 \ 1]$ in every fourth row, we remove the imaginary part of the eigenvectors and subsequently project 3×3 rotation blocks onto $\text{SO}(3)$.

In summary, an approximate solution to rigid-motion synchronization in $\text{SE}(3)$ can be found by computing either the four least right singular vectors of \hat{L} or the four top eigenvectors of \hat{P} . An empirical comparison between the former—called NULL-SE(3)—and the latter—called EIG-SE(3)—is provided in section 3. In both cases the matrices are sparse, so in the implementation we exploited the sparse eigensolver of MATLAB (`eigs`) in EIG-SE(3) and the sparse SVD routine (`svds`) in NULL-SE(3). As a matter of fact, `svds(A)` calls `eigs([0 A; A' 0])`, as reported in the function documentation, and consequently—as confirmed by our simulations—it runs more slowly, for the dimension of the matrix is double. From the computational complexity point of view, the Lanczos method (implemented by `eigs`) is “nearly linear,” meaning that, if the matrix is sparse, every iteration is linear in n [21], but the number of iterations cannot be bounded by a constant.

2.3. Dealing with outliers. The fact that our spectral method easily copes with weights on individual relative orientations, by way of the weighted adjacency matrix A , allows a straightforward extension to gain resilience to rogue input measures via IRLS [29]. Such outliers are ubiquitous in real scenarios. In the structure-from-motion context, for example, repetitive structures in the images cause epipolar geometries which are not compatible with the 3D geometry of the scene. In global registration of multiple point-sets, outliers are caused by faulty pairwise registration, which can be originated by insufficient overlap and/or bad initialization.

First, we obtain an estimate for M with given weights³ as explained in the previous section. Then, we update the weights w_{ij} using the current estimate of absolute orientations, and these

³The initial weights are all 1 by default, but they can be initialized from any reliability information coming from the relative orientation estimation procedure.

steps are iterated until convergence or a maximum number of iterations is reached. In our experiments we used the Cauchy weight function

$$(2.30) \quad w_{ij} = \frac{1}{1 + \left(\frac{r_{ij}}{c}\right)^2}$$

with $r_{ij} = \|\widehat{R}_{ij} - R_i R_j^\top\|_F$. It is more convenient to define the residual in terms of the rotational component only, because the translation is affected by an arbitrary scale in the structure-from-motion scenario. On the other hand, it is reasonable to assume that if a relative orientation is an outlier, then both the rotation and translation components are wrong.

The factor c has been computed, as is customary, with

$$(2.31) \quad c = 1.482 \operatorname{med}(|\mathbf{r} - \operatorname{med}(\mathbf{r})|) \cdot \theta,$$

where $\operatorname{med}(\cdot)$ is the median operator, \mathbf{r} is the vectorization of the residuals r_{ij} , and θ is a tuning constant set to $\theta = 2$ in our experiments.

2.4. Generalization to SE(N). In this paper we focus on SE(3) because this group arises in several applications. However, it is straightforward to see that our analysis and the derived spectral method apply equally well to any dimension.

Suppose that we are given a redundant number of pairwise ratios $M_{ij} \in \operatorname{SE}(N)$, and we want to estimate the associated group elements $M_i \in \operatorname{SE}(N)$, which represent rigid displacements in \mathbb{R}^N . If the graph is complete, then—in the absence of noise—the block-matrix $X \in \mathbb{R}^{(N+1)n \times (N+1)n}$ has rank $N + 1$, and the columns of M are $N + 1$ eigenvectors of X with eigenvalue n , or, equivalently, they form a basis for the $(N + 1)$ -dimensional null-space of L . If the graph is not complete, then (2.6) and (2.15) still hold; thus we can generalize our spectral method to synchronize elements of SE(N), by computing the $N + 1$ least right singular vectors of \widehat{L} , or by computing the $N + 1$ top eigenvectors of \widehat{P} .

Mutatis mutandis, the method applies as well to the group of Euclidean motions $E(N)$.

3. Experiments. We evaluated our spectral solutions on both simulated and real data in terms of accuracy, execution time, and robustness to outliers. We compared EIG-SE(3) and NULL-SE(3) to several techniques from the state-of-the-art. All of the experiments were performed on a MacBook Air with i5 dual-core @ 1.3 GHz. The MATLAB code is available on the web at <http://www.diegm.uniud.it/fusiello/demo/gmf>.

In order to compare estimated and ground-truth absolute orientations, we found the optimal isometry that aligns them by applying single averaging for the rotation term and least-squares for the translation (and scale). Specifically, if $\widehat{M}_1, \dots, \widehat{M}_n$ are estimates of the theoretical absolute orientations M_1, \dots, M_n , then the optimal $N \in \operatorname{SE}(3)$ that aligns them into a common reference system solves $M_i = \widehat{M}_i N$, which is equivalent to $R_i = \widehat{R}_i R$ and $\mathbf{t}_i = \widehat{R}_i \mathbf{t} + \widehat{\mathbf{t}}_i$ by considering separately the rotation and translation term. Thus the optimal $R \in \operatorname{SO}(3)$ is the single mean of the set $\{R_i \widehat{R}_i^\top, i = 1, \dots, n\}$, which can be estimated by applying ℓ_1 -geodesic averaging [26], while the optimal $\mathbf{t} \in \mathbb{R}^3$ is computed in the least-squares sense. If a bearing-based method is considered, a scale $s \in \mathbb{R}$ has to be estimated in addition to the translation $\mathbf{t} \in \mathbb{R}^3$, resulting in a linear system of the form $\mathbf{t}_i = \widehat{R}_i \mathbf{t} + s \widehat{\mathbf{t}}_i$.

We used the angular distance $d_{\angle}(R_i, \hat{R}_i)$ and Euclidean norm $\|\mathbf{t}_i - \hat{\mathbf{t}}_i\|_2$ to measure the accuracy of absolute rotations and translations, respectively, where the angular (or geodesic) distance between two rotations $R, S \in \text{SO}(3)$ is the angle (in the angle-axis space) of the rotation SR^T so chosen to lie in the range $[0, 180^\circ]$, namely $d_{\angle}(S, R) = d_{\angle}(RS^T, I) = 1/\sqrt{2} \|\log(RS^T)\|_2$. Note that the angular distance is equivalent to the Frobenius norm in the sense that they are related by a positive continuous strictly increasing function [31], namely $\|R - S\|_F = 2\sqrt{2} \sin(1/2 d_{\angle}(S, R))$.

Experimental results on simulated data are presented in section 3.1, while in sections 3.2 and 3.3 we report experiments on real data in the context of structure-from-motion and multiple point-set registration.

3.1. Simulated data. In these experiments we considered n absolute orientations in which rotations are sampled from random Euler angles and translation components follow a standard Gaussian distribution. The measurement graph $\mathcal{G} = (\mathcal{V}, \mathcal{E})$ is a random graph drawn from the Erdős–Rényi model with parameters (n, p) , i.e., given a vertex set $\mathcal{V} = \{1, 2, \dots, n\}$, each edge (i, j) is in the set \mathcal{E} with probability p , independently of all other edges. The true relative orientations were corrupted by a multiplicative noise $\widehat{M}_{ij} = M_{ij}E_{ij}$, with $E_{ij} \in \text{SE}(3)$ representing a small perturbation of the identity matrix. The rotation component of E_{ij} has the axis uniformly distributed over the unit sphere and angle following a Gaussian distribution with zero mean and standard deviation $\sigma_R \in [1^\circ, 10^\circ]$, and the translation components were sampled from a Gaussian distribution with zero mean and standard deviation $\sigma_T \in [0.01, 0.1]$. In this way we perturbed both the direction and the magnitude of pairwise translations. All of the results were averaged over 50 trials.

We evaluated the effect of noise on rotations and translations, both separately and together, by considering $n = 100$ absolute orientations, in the cases $p = 0.05$ and $p = 0.3$, which correspond to about 95% and 70% of missing pairs, respectively. Higher values of p correspond to better conditioned problems, with the same qualitative behavior as $p = 0.3$. Please note that in the real cases reported in Table 3 the percentage of missing pairs ranges from 30% to 90%.

Rotation. Besides the SE(3)-averaging technique developed by Govindu (Govindu-SE(3)) [23] and the Diffusion method by Torsello, Rodola, and Albarelli [57], we considered general synchronization techniques such as the Weiszfeld algorithm [26], spectral relaxation [3] (EIG), semidefinite programming [3] (SDP), the L1-IRLS algorithm [13], and the R-GoDEC algorithm [6]. Methods based on quaternions (such as [22]) were already proved inferior to the other methods in [36]. The codes of L1-IRLS and Diffusion are available online, and the one of Govindu-SE(3) was provided by the author, while in the other cases we used our implementation. The parameter that determines the transition from quadratic to fixed loss in L1-IRLS was set equal to ten degrees in these simulations.

Figure 1 reports the mean angular errors on the absolute rotations as a function of σ_R , obtained by running the rotation synchronization techniques mentioned above. The noise on relative translations does not have any influence on absolute rotations; hence the value of σ_T is meaningless in this experiment. The best accuracy is obtained by our methods EIG-SE(3) and NULL-SE(3) together with EIG, SDP, Govindu-SE(3), and Diffusion. On the contrary, the robust approaches R-GoDEC, L1-IRLS, and Weiszfeld yield worse results, to different extents,

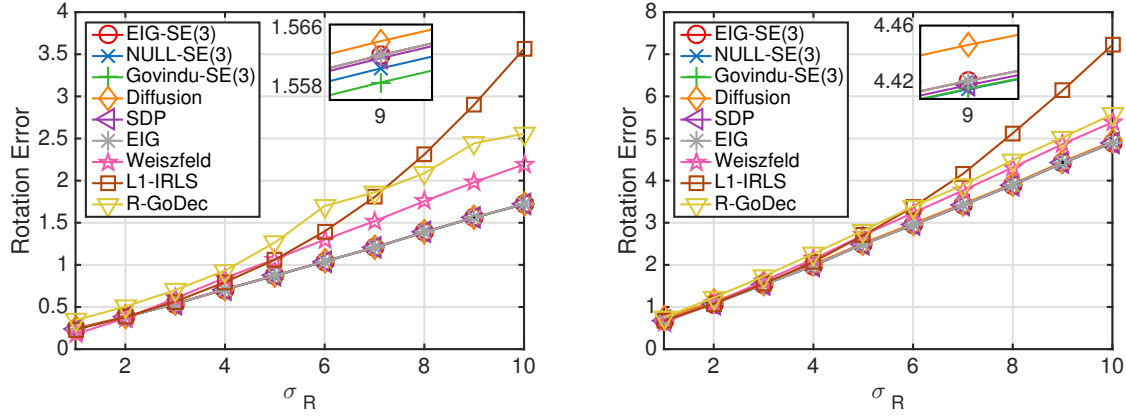


Figure 1. Mean angular errors (degrees) on the absolute rotations with $p = 0.3$ (left) and $p = 0.05$ (right). The value of σ_T does not affect rotations. The inset shows a magnification at $\sigma_R = 9^\circ$.

because they inherently trade robustness for statistical efficiency. By manual inspection it can be seen that EIG-SE(3) coincides with EIG, according to the fact that the former generalizes the latter.

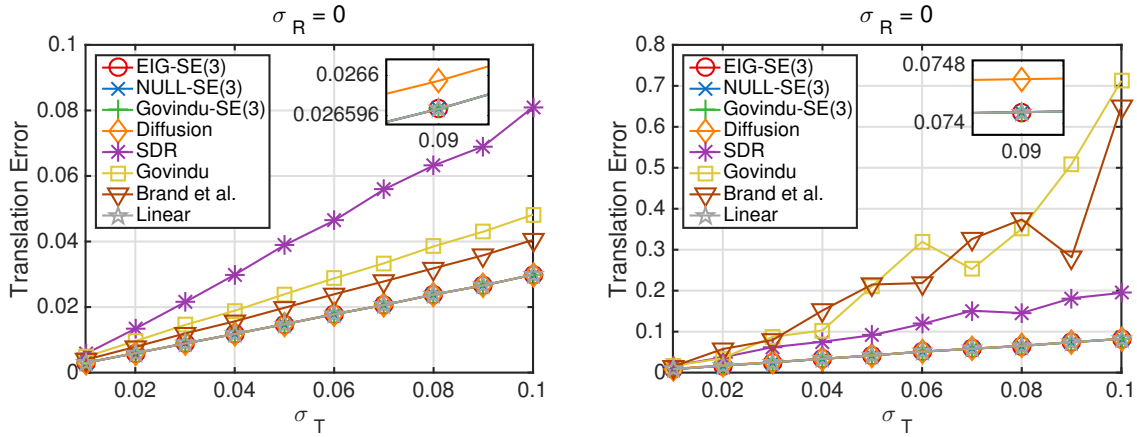


Figure 2. Mean errors on the absolute translations with $p = 0.3$ (left) and $p = 0.05$ (right). The inset shows a magnification at $\sigma_T = 0.09$.

Translation. We considered only methods working in frame space, i.e., not requiring point correspondences, such as SDR [42], the graph-embedding approach by Brand, Antone, and Teller [12], the Diffusion method [57], and two works by Govindu [22, 23]. Among these methods, only EIG-SE(3), NULL-SE(3), Govindu-SE(3) [23], and Diffusion are influenced by the noise on the translation norms, for they take as input matrices in SE(3), while this does not influence the remaining algorithms, which take as input relative translation directions. We also included in the comparison the Linear method for translation synchronization derived by solving (1.5) in the least-squares sense, assuming that the translation norms are available

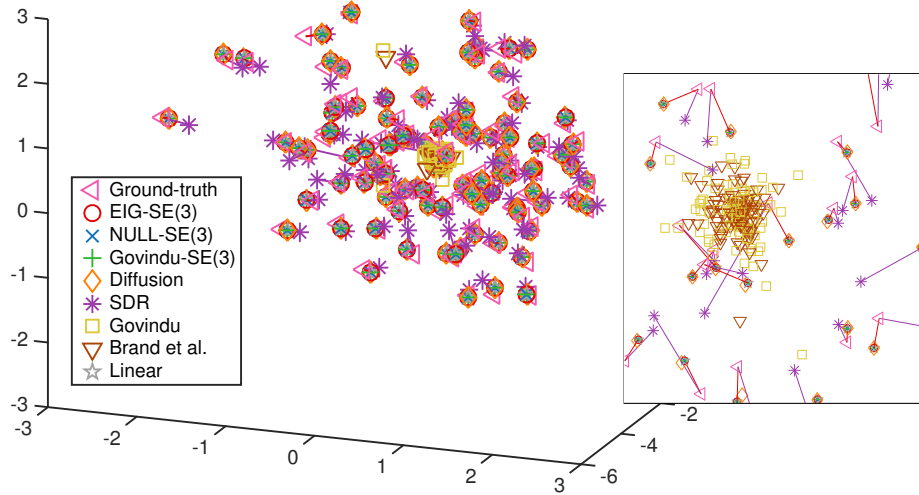


Figure 3. *Clustering phenomenon. The inset shows a magnification of the center of the cloud. The reader will distinguish one cluster of yellow squares and one of reddish triangles near the origin, which correspond to the locations obtained by Govindu [22] and Brand, Antone, and Teller [12], respectively.*

and absolute rotations have been computed beforehand. The code of SDR is available online, while in the other cases we used our implementation. In this simulation we did not perturb relative rotations ($\sigma_R = 0$); thus all the methods were given ground-truth relative/absolute rotations. Noise on rotational components also influences the translation errors with results qualitatively similar to those reported here.

Figure 2 shows the mean errors on the absolute translations as a function of σ_T (units are commensurate with the simulated data), obtained after running the techniques mentioned above. Our methods EIG-SE(3) and NULL-SE(3) together with Govindu-SE(3), Diffusion, and the Linear solution outperform all the analyzed techniques in terms of accuracy.

When the measurement graph is extremely sparse ($p = 0.05$), the methods by Govindu [22] and Brand, Antone, and Teller [12] yield larger errors than usual. By inspecting the solution it is found that this corresponds to wrong solutions concentrated around a few locations. This can be visualized in Figure 3, which shows ground-truth and estimated positions (after alignment) for a single trial when $\sigma_T = 0.1$. Such behavior—called the clustering phenomenon—affects the methods that use only the direction of translation (or bearing), and the cause has been traced back to a lack of constraints on the location distances in [42]. For this reason ad-hoc constraints were introduced in the minimization problem in [42], forcing the differences between translations to be “sufficiently” large. On the other hand, EIG-SE(3), NULL-SE(3), Govindu-SE(3), Diffusion, and the Linear solution implicitly enforce such constraints as they take as input the relative translations with their norm.

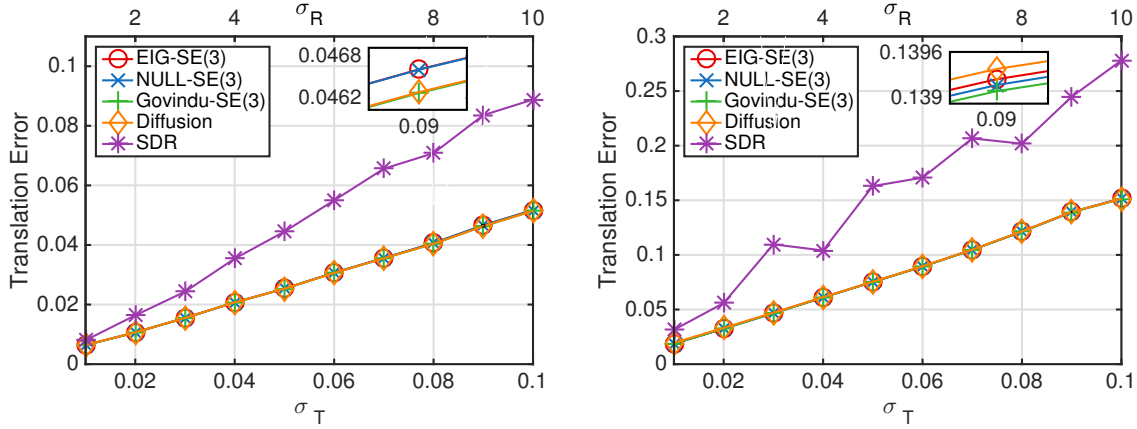


Figure 4. Mean errors on the absolute translations with noise on both relative rotations and translations, with $p = 0.3$ (left) and $p = 0.05$ (right). The inset shows a magnification at $(\sigma_T, \sigma_R) = (0.09, 9^\circ)$.

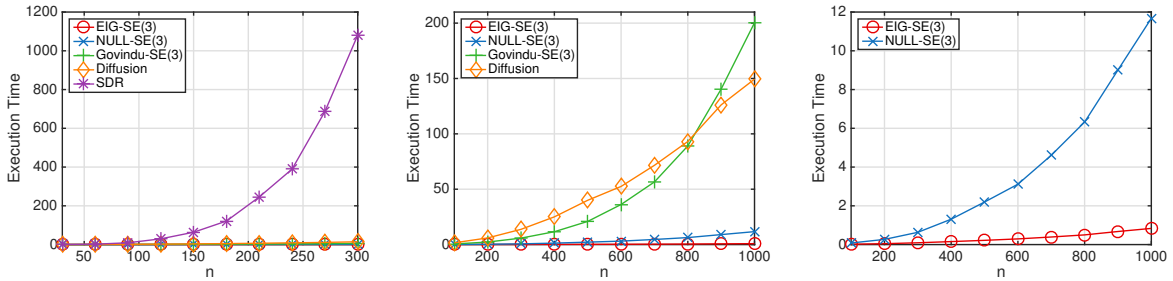


Figure 5. Execution times (seconds) of rigid-motion synchronization versus number of nodes. The SDR algorithm is analyzed only with a maximum of 300 nodes in this experiment due to computational limitations. A magnification is shown on the right to highlight the difference between EIG-SE(3) and NULL-SE(3).

Rigid-motion synchronization. We considered only methods that cope with rigid-motion synchronization and work in frame space, such as SDR [42], Govindu-SE(3) [23], and Diffusion [57]. Beside SDR—which has an original translation stage and uses EIG to synchronize rotations—all of the other methods recover rotations and translations simultaneously.

Figure 4 reports the mean errors on the absolute translations obtained after perturbing both relative rotations and translations. All of the methods return good estimates, which are further improved by increasing edge connectivity, and the lowest errors are achieved by EIG-SE(3), NULL-SE(3), Govindu-SE(3), and Diffusion.

We also analyzed the execution time of rigid-motion synchronization, by varying the number of absolute orientations from $n = 30$ to $n = 1000$, with all of the other parameters being fixed. More precisely, we chose the values $p = 0.2$ (about 80% missing data), $\sigma_T = 0.05$, and $\sigma_R = 5^\circ$ to define sparsity and noise. We implemented EIG-SE(3) and NULL-SE(3) in MATLAB using `eigs` with \hat{P} as input and `svds` with \hat{L} as input, respectively. Govindu-SE(3) and SDR are in MATLAB as well (code from the authors), while Diffusion [57] is implemented in C++ (by the authors).

Figure 5 reports the running times of the analyzed algorithms as a function of the number of nodes in the measurement graph, showing that SDR is remarkably slower than the other techniques. In particular, both of our methods are faster than the others, and EIG-SE(3) is the fastest overall, computing a solution in less than two seconds for $n = 1000$.

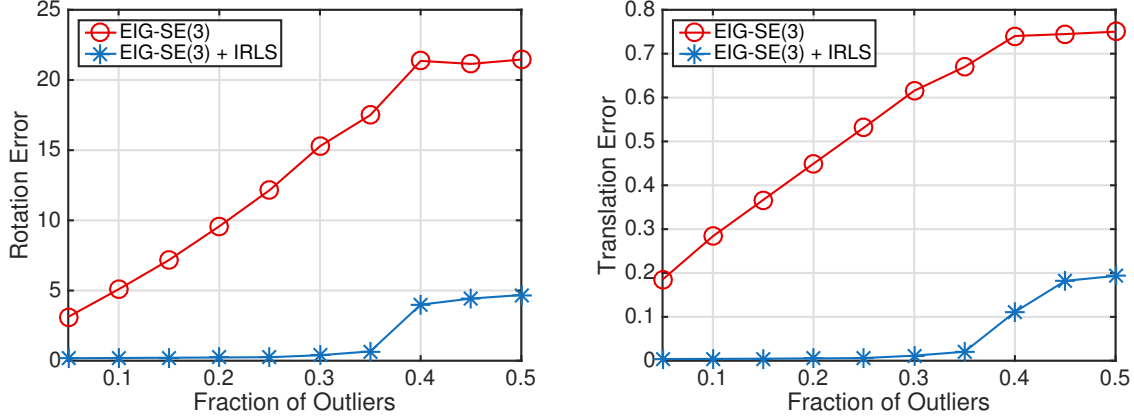


Figure 6. Mean errors on the absolute orientations versus outliers contamination with $\sigma_T = \sigma_R = 0$.

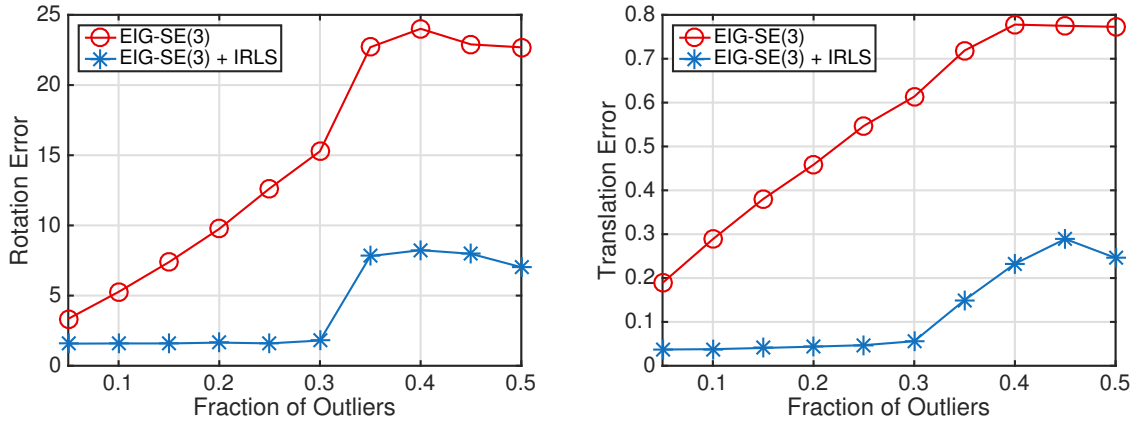


Figure 7. Mean errors on the absolute orientations versus outliers contamination, with noise on both relative rotations and translations.

In the additional material (M106024_01.pdf [local/web 162KB]), the method described in [46] is also evaluated, on a smaller number of views, due to its high computational cost. As expected, [46] slightly improves the results over EIG-SE(3) and NULL-SE(3) (for it minimizes a geometric objective function) but at the cost of a much longer execution time (for instance, it takes around ten minutes for a single trial with $n = 100$ and $p = 0.3$).

The rundown of these experiments is that EIG-SE(3) achieves the same optimal accuracy of its closest competitors in considerably less time. Therefore, we elect EIG-SE(3) as our choice and drop NULL-SE(3) in subsequent comparisons.

Outliers’ influence. In this experiment we studied the resilience to outliers of EIG-SE(3) coupled with IRLS. We considered $n = 100$ absolute orientations sampled as before, and we fixed $p = 0.2$ to define sparsity. Since we are interested in analyzing exact recovery in the presence of outliers, noise was not introduced in this first simulation. The percentage of outliers—randomly generated—varies from 10% to 50%. Such a percentage refers to the number of available relative orientations, not to the maximum number of pairs (i.e., $n(n - 1)/2$). Figure 6 reports the mean errors obtained by EIG-SE(3) and its IRLS modification. It clearly shows the robustness gained by IRLS: exact recovery is achieved by up to 35% of outliers, but good performances are still obtained until 50% of outliers.

Next, we analyzed the behavior of our approach in the presence of both noise and outliers. We introduced a fixed level of noise on the relative orientations ($\sigma_T = 0.05, \sigma_R = 5^\circ$), and all the other parameters were chosen as before. Results are reported in Figure 7, showing that the empirical breakdown point of EIG-SE(3) + IRLS is about 30%.

3.2. Real data: Structure from motion. We applied our method EIG-SE(3) + IRLS to the structure-from-motion problem, considering both the EPFL benchmark [53] and unstructured, large-scale image sequences from [64]. The latter are available online together with the relative orientations, while for the EPFL benchmark we computed them following a standard approach based on the essential matrix with a final bundle adjustment (BA) refinement of camera pairs.

Owing to the depth-speed ambiguity, the magnitude of relative translations (also referred to as *epipolar scales*) is undefined. Therefore, the input relative orientations do not fully specify elements of SE(3), and the unknown scales have to be computed.

A straightforward approach (suggested in [23]) consists of iteratively updating these epipolar scales, i.e., during each iteration the scale of the translation of \widehat{M}_{ij} is set equal to that of $M_i M_j^{-1}$, where M_i and M_j are the current estimates of camera orientations. The starting scales are all equal to one, and the procedure is iterated until convergence. In our implementation this is combined with IRLS in the same loop: in one step we update the IRLS weights, and in the next step we update the epipolar scales.

A different approach is proposed in [4], where a two-stage method is developed for computing the epipolar scales based on the knowledge of two-view geometries only. First, a cycle basis for the measurement graph \mathcal{G} is extracted, and then all of the scales are recovered simultaneously by solving a homogeneous linear system. This approach is based on the observation that the compatibility constraints associated to cycles can be seen as equations in the unknown scales. In this way all of the unknown norms are computed before performing rigid-motion synchronization. In this paper we used the robust version of such an approach (named NMCB in [4]) where the cycle basis is a Minimum Cycle Basis composed of null-cycles (i.e., cycles whose relative rotations compose to the identity), which is computed through a modified version of Horton’s algorithm [30]. It is shown in [58] that theoretical conditions under which the epipolar scales can be uniquely (up to a global scale) recovered are the same as the bearing-only localization problem; i.e., the measurement graph is required to be parallel rigid [42, 63].

However, computing the epipolar scales is not part of the synchronization task, strictly speaking. As a matter of fact, this indeterminacy is an idiosyncrasy of the structure-from-

motion problem, which is not shared, e.g., by multiple point-set registration, where the relative orientations are fully specified. For this reason we are agnostic about the specific method for computing the scales, and we also provide results obtained by using ground-truth scales, in addition to the approaches mentioned above.

EPFL benchmark. The EPFL benchmark datasets [53] contain from 8 to 30 images and provide ground-truth absolute orientations. Results are reported in Tables 1 and 2, which show the mean errors of rigid-motion synchronization before and after applying a two-step BA, as done in [38], where in the first step rotations are kept fixed.

Table 1

Mean angular errors (degrees) on camera rotations for the EPFL benchmark. Moulon, Monasse, and Marlet is missing in this table because rotation errors are not reported in [38].

| Dataset | EIG-SE(3)-GT | | EIG-SE(3)-Iter | | EIG-SE(3)-NMCB | | SDR | | R-GoDEC+Brand | | SAMANTHA |
|-------------|--------------|---------|----------------|---------|----------------|---------|--------|---------|---------------|---------|----------|
| | pre BA | post BA | pre BA | post BA | pre BA | post BA | pre BA | post BA | pre BA | post BA | post BA |
| HerzJesuP8 | 0.04 | 0.03 | 0.03 | 0.03 | 0.03 | 0.03 | 0.06 | 0.03 | 0.04 | 0.03 | 0.04 |
| HerzJesuP25 | 0.07 | 0.03 | 0.07 | 0.04 | 0.06 | 0.04 | 0.14 | 0.04 | 0.13 | 0.04 | 0.03 |
| FountainP11 | 0.03 | 0.03 | 0.03 | 0.04 | 0.03 | 0.03 | 0.03 | 0.03 | 0.03 | 0.03 | 0.06 |
| EntryP10 | 0.05 | 0.02 | 0.06 | 0.02 | 0.05 | 0.03 | 0.56 | 0.04 | 0.44 | 0.03 | 0.05 |
| CastleP19 | 0.41 | 0.06 | 0.44 | 0.06 | 0.41 | 0.06 | 3.69 | 0.05 | 1.57 | 0.05 | 0.09 |
| CastleP30 | 0.40 | 0.05 | 0.48 | 0.05 | 0.40 | 0.05 | 1.97 | 0.05 | 0.78 | 0.05 | 0.06 |

Table 2

Mean errors (meters) on camera translations for the EPFL benchmark.

| Dataset | EIG-SE(3)-GT | | EIG-SE(3)-Iter | | EIG-SE(3)-NMCB | | SDR | | R-GoDEC+Brand | | Moulon | SAMANTHA |
|-------------|--------------|---------|----------------|---------|----------------|---------|--------|---------|---------------|---------|---------|----------|
| | pre BA | post BA | pre BA | post BA | pre BA | post BA | pre BA | post BA | pre BA | post BA | post BA | post BA |
| HerzJesuP8 | 0.004 | 0.004 | 0.512 | 0.004 | 0.008 | 0.004 | 0.007 | 0.005 | 0.009 | 0.004 | 0.004 | 0.007 |
| HerzJesuP25 | 0.010 | 0.008 | 0.931 | 0.022 | 0.017 | 0.008 | 0.065 | 0.009 | 0.038 | 0.009 | 0.005 | 0.031 |
| FountainP11 | 0.002 | 0.003 | 0.257 | 0.003 | 0.005 | 0.003 | 0.004 | 0.003 | 0.006 | 0.003 | 0.003 | 0.006 |
| EntryP10 | 0.008 | 0.008 | 0.307 | 0.008 | 0.167 | 0.009 | 0.203 | 0.010 | 0.433 | 0.009 | 0.006 | 0.022 |
| CastleP19 | 0.218 | 0.034 | 3.747 | 0.034 | 2.971 | 0.035 | 1.769 | 0.032 | 1.493 | 0.036 | 0.026 | 0.046 |
| CastleP30 | 0.150 | 0.032 | 2.308 | 0.035 | 0.908 | 0.034 | 1.393 | 0.030 | 1.123 | 0.030 | 0.022 | 0.033 |

We considered three versions of EIG-SE(3), which differ from the technique chosen to recover the epipolar scales, namely using ground-truth (GT) scales, computing the scales through [4] (NMCB), and updating the scales iteratively (Iter). Our spectral solution is compared with the SDR method [42] and the global structure-from-motion pipeline described by Moulon, Monasse, and Marlet [38]. We also considered the pipeline obtained by combining the R-GODEC algorithm [6] with the translation recovery method in [12], which is analyzed in [5]. As a reference, we included in the comparison the hierarchical structure-from-motion pipeline SAMANTHA [56], whose binary code is publicly available. With the exception of Moulon, Monasse, and Marlet, for which results are taken from [38], and SAMANTHA, which processes images directly, all of the other methods are given the same relative orientations as input.

Both EIG-SE(3) and all the analyzed techniques achieve a high precision, obtaining an average rotation error less than 0.1 degrees and an average translation error of the order of

millimeters, after the final BA. Our method is able to recover camera parameters efficiently, since the rigid-motion synchronization step takes less than 0.5 seconds for all the sequences.

If we concentrate on the EIG-SE(3)-GT columns, we can see that it achieves the optimum *before* BA in most datasets, confirming the effectiveness of our method for averaging relative orientations, when the latter are fully specified. Without ground-truth scales, good estimates of orientation parameters are still obtained, and precision increases by using NMCB rather than the iterative approach. The errors after BA are always very small and almost equal to the other methods, confirming that EIG-SE(3) provides a good starting point for BA.

Large-scale datasets. We tested our technique on irregular large-scale collections of images taken from [64], for which recovering camera orientations is challenging. Following the experiments in [64], we used the output of BUNDLER [52] as reference solution, and we computed the optimal isometry between this solution and our estimate with least median of squares (LMedS), using correspondences between camera centers. Since our MATLAB implementation of [4] is too slow for large datasets, we did not compute the scales through NMCB in this experiment and used the iterative update instead.

Table 3

Median errors (rotation in degrees, translation in meters) on the datasets from [64] before BA. Times are in seconds. Some values are missing in this table since some datasets are not analyzed in [41] and [16]. The lowest translation errors are highlighted in boldface.

| Dataset | n | miss % | EIG-SE(3)-Iter | | | 1DSfM | | SDR | | CLS | | LUD | | Cui et al. | |
|---------------------|------|--------|----------------|------------|------|------------|------|------|------|------|------|------------|------|------------|------|
| | | | rot. | tra. | time | tra. | time | tra. | time | tra. | time | tra. | time | tra. | time |
| Piccadilly | 2446 | 89 | 5.7 | 7.1 | 230 | 4.1 | 936 | – | – | – | – | – | – | – | – |
| Roman Forum | 1102 | 88 | 5.5 | 17.2 | 77 | 6.1 | 172 | – | – | – | – | – | – | – | – |
| Vienna Cathedral | 898 | 74 | 1.6 | 3.2 | 87 | 6.6 | 242 | – | – | 8.8 | 313 | 5.4 | 522 | 3.5 | 242 |
| Union Square | 853 | 93 | 4.6 | 5.7 | 27 | 5.6 | 92 | – | – | – | – | – | – | – | – |
| Alamo | 606 | 47 | 1.2 | 0.7 | 67 | 1.1 | 129 | – | – | 1.3 | 143 | 0.4 | 289 | 0.6 | 259 |
| Notre Dame | 553 | 32 | 0.7 | 0.5 | 47 | 10 | 112 | – | – | 0.8 | 187 | 0.3 | 382 | 0.3 | 366 |
| Tower of London | 489 | 80 | 2.7 | 5.7 | 17 | 11 | 64 | 20 | 376 | 16 | 32 | 4.7 | 65 | 4.4 | 100 |
| Montreal Notre Dame | 467 | 52 | 0.6 | 0.7 | 22 | 2.5 | 92 | – | – | 1.1 | 89 | 0.5 | 180 | 0.8 | 125 |
| Yorkminster | 448 | 72 | 1.8 | 6.4 | 17 | 3.4 | 104 | 5.0 | 667 | 6.2 | 29 | 2.7 | 70 | 3.7 | 45 |
| Madrid Metropolis | 370 | 65 | 3.9 | 8.1 | 14 | 9.9 | 35 | 4.2 | 208 | 6.4 | 33 | 1.6 | 54 | – | – |
| NYC Library | 358 | 68 | 1.8 | 2.3 | 12 | 2.5 | 63 | 5.0 | 489 | 5.0 | 34 | 2.0 | 84 | 1.4 | 42 |
| Piazza del Popolo | 345 | 58 | 0.9 | 1.1 | 17 | 3.1 | 49 | 1.9 | 393 | 3.5 | 44 | 1.5 | 70 | 2.6 | 51 |
| Ellis Island | 240 | 29 | 0.7 | 3.2 | 11 | 3.7 | 25 | – | – | – | – | – | – | 3.1 | 31 |

Results are reported in Table 3, which shows the median errors of rigid-motion synchronization before applying BA. We also reported the number of views that were synchronized and the percentage of missing pairs, which refer to the largest parallel rigid subgraph, extracted as explained in [42].

We compared EIG-SE(3) with a recent technique—called 1DSfM [64]—which first removes outlier directions by solving simpler low-dimensional subproblems, and then compute absolute translations through the Levenberg–Marquardt algorithm. We also included in the comparison the semidefinite-relaxation (SDR) method [42], the constrained-least-squares (CLS) technique [60], the least-unsquared-deviations (LUD) solver [41], and the method by Cui et al. [16]. The results of 1DSfM are taken from [64], the results of LUD, SDR, and CLS are taken from [41], and the results by Cui et al. are taken from [16]. In all of these papers rotation errors are not

analyzed; therefore, the comparison concentrates on translation errors. In this respect, the median errors reported in Table 3 show that EIG-SE(3) with iterative scale estimate performs equally to or better than 1DSfM in 10 cases out of 13, and it always provides results in the same range of the best methods, namely LUD and Cui et al. These methods, however, form a class on their own, since they internally refine the pairwise directions, whereas 1DSfM and EIG-SE(3) use as input the relative orientations as they are. In LUD such directions are computed through an IRLS scheme robust to outlier correspondences, while in Cui et al. they are obtained through the method described in [34].

Computation times of 1DSfM, LUD, CLS, and SDR reported in Table 3 are obtained by summing the execution costs of rotation and translation recovery. Note that this is an underestimation as the sum does not include the execution cost of intermediate steps which are still part of the rigid-motion synchronization pipeline, namely outlier removal in 1DSfM and robust pairwise direction estimation in LUD, CLS, and SDR. Computation times of the method by Cui et al. are obtained by subtracting the cost for BA refinement from the total execution cost reported in [16].

Please note that the execution times are taken from different papers [64, 41, 16] and were obtained on disparate computers. Albeit not directly comparable to each other, these machines are all more powerful than ours, however. Notwithstanding this, results in Table 3 demonstrate that our method is the fastest solution among all the analyzed techniques.

The summary of these experiments with real datasets confirms that, with respect to its competitors, EIG-SE(3) delivers results of comparable accuracy in substantially less time.













Table 4
Mean angular errors (degrees) on absolute rotations for the Stanford repository.

| Dataset | n | % missing | EIG-SE(3) | Govindu-SE(3) | Diffusion | Weiszfeld+Linear |
|---------|-----|-----------|-----------|---------------|-----------|------------------|
| Bunny | 10 | 30 | 0.91 | 0.91 | 0.91 | 0.89 |
| Buddha | 15 | 20 | 0.99 | 1.01 | 1.00 | 0.86 |
| Dragon | 15 | 10 | 1.06 | 1.06 | 1.06 | 0.84 |

3.3. Real data: Multiple point-set registration. We applied our spectral method to multiple point-set registration, considering both the Stanford 3D Scanning Repository [1] and large-scale datasets used also in [18]. To obtain estimates of relative orientations we applied the Iterative Closest Point Algorithm (ICP) [11] to pairs of 3D point sets, as is customary, and we defined the measurement graph by discarding all of the pairs with high registration error. With a careful threshold selection, this created a graph with no outliers. Note that, in contrast to the structure-from-motion application, in this case there is not a scale ambiguity in relative translations, for pairwise registration returns elements of SE(3).

Stanford 3D repository. From the Stanford 3D Scanning Repository [1] we used the Bunny, Happy Buddha (standing), and Dragon (standing) datasets, which contain 10, 15, and 15 point sets, respectively. As for the initialization of the ICP algorithm, we perturbed the true relative orientations by a rotation with random axis and angle uniformly distributed over $[0, 2^\circ]$, similarly to the experiments carried out in [25]. In order to evaluate the performances

Table 5
Cross-sections of registered point-sets on the Stanford repository.

| Dataset | EIG-SE(3) | Govindu-SE(3) | Diffusion | Weiszfeld+Linear |
|---------|---|---|--|---|
| Bunny |  |  |  |  |
| Buddha |  |  |  |  |
| Dragon |  |  |  |  |

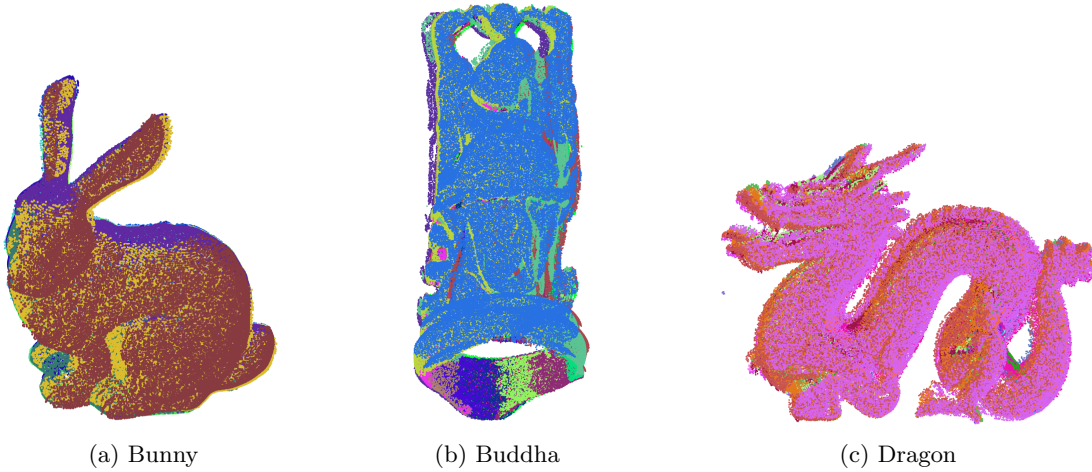


Figure 8. 3D models obtained with our method on the Stanford repository. Different colors correspond to different point sets.

of rigid-motion synchronization in itself, we considered only registration techniques working in frame space, i.e., not requiring point correspondences, and all of the methods were given the same relative orientations as input. We compared our method EIG-SE(3) against Govindu-SE(3) [23], Diffusion [57], and we also considered the combination of the Weiszfeld algorithm [26] with the Linear solution for translation synchronization. On account of the fact that such techniques are not robust, in this experiment we used our EIG-SE(3) method without IRLS so as to perform a fair comparison.

Since ground-truth absolute orientations are available for these datasets, we evaluated the

results quantitatively by reporting the mean angular errors of rigid-motion synchronization in Table 4 (translation errors are not reported since they are less than 1 millimeter for all the datasets/methods). We also qualitatively evaluated the results in terms of cross-sections in Table 5. Finally, for visualization purposes, we report in Figure 8 the 3D models obtained by aligning the original point clouds with our method. Both EIG-SE(3) and all the analyzed techniques achieve a good precision, yielding accurate cross-sections and an average rotation error of the order of 1 degree. Differences in execution time are meaningless for such relatively small datasets and are not reported. EIG-SE(3) took about 0.02 seconds for all these sequences.
















Table 6

Execution times (sec.) of rigid-motion synchronization for the datasets used in [18].

| Dataset | n | % missing | EIG-SE(3) | Govindu-SE(3) | Diffusion | Weiszfeld+Linear |
|----------|-----|-----------|-----------|---------------|-----------|------------------|
| Gargoyle | 27 | 62 | 0.02 | 0.08 | 0.22 | 0.47 |
| Capital | 100 | 76 | 0.04 | 0.70 | 2.11 | 4.17 |
| Madonna | 169 | 93 | 0.07 | 0.59 | 1.67 | 4.01 |

Table 7

Cross-sections of registered point-sets on the datasets used in [18].

| | Dataset | EIG-SE(3) | Govindu-SE(3) | Diffusion | Weiszfeld+Linear |
|----------|---|---|---|--|---|
| Gargoyle |  |  |  |  |  |
| Capital |  |  |  |  |  |
| Madonna |  |  |  |  |  |

Large-scale datasets. The datasets used in [18] contain 27 (Gargoyle), 103 (Capital), and 196 (Madonna) point-sets, respectively. In the Madonna dataset, each scan covers a small portion of the entire object, thus making the registration task very challenging. Since there is no information about the scans, we simply initialized the ICP algorithm with identity matrices.

Results are reported in Tables 6 and 7, which show the execution times of rigid-motion synchronization and cross-sections of output 3D models. We also report the number of point-sets

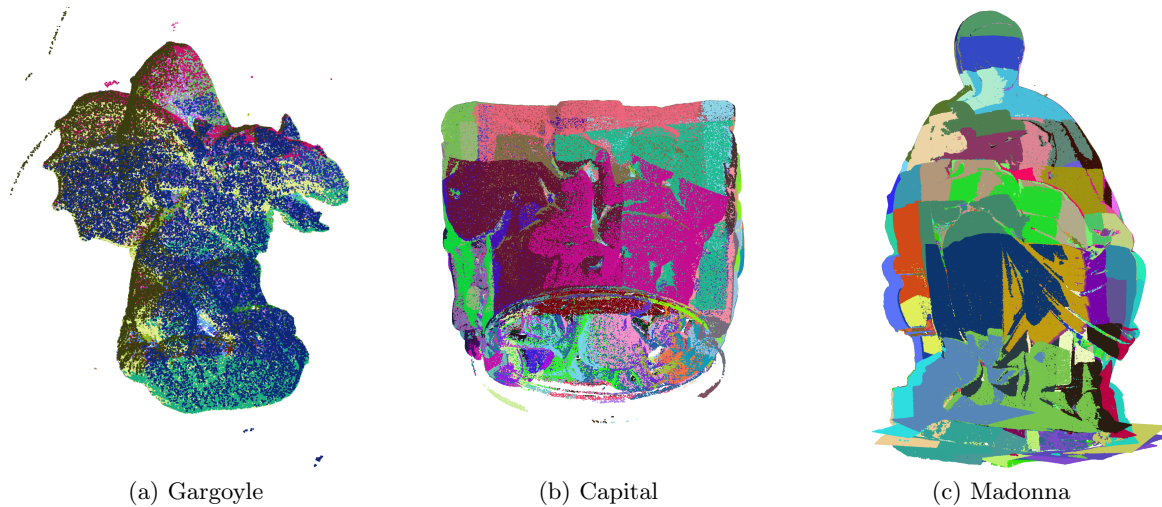


Figure 9. 3D models obtained with our method on the datasets used in [18]. Different colors correspond to different point sets.

registered and the percentage of missing pairs, which refer to the largest connected component of the cleaned graph. As before, for visualization purposes, we report the whole 3D models obtained by aligning the original point clouds with our method (Figure 9).

Note that, if needed, the estimates of absolute orientations obtained in this way can be further improved by alternating rigid-motion synchronization and computing relative orientations, as suggested in [25, 57].

These experiments show that our method is the fastest solution within all the analyzed techniques, while being comparable in accuracy and providing high-quality reconstructions.

4. Conclusion. We presented a novel approximate solution to rigid-motion synchronization in $SE(3)$. Our method is extremely fast, being based on a spectral decomposition problem, and theoretically relevant, for it computes at the same time both rotations and translations. Experiments on synthetic and real data showed that our method: (i) provides accurate estimates of absolute rotations and translations (comparable to the state of the art); (ii) it is the fastest among the existing techniques; (iii) it can be successfully applied to multiple point-set registration, returning reliable and accurate 3D models in low execution time; and (iv) combined with a method for estimating the unknown translation norms, it can be profitably used in a global structure-from-motion pipeline to obtain a fast/high-quality initialization for BA algorithms.

Acknowledgments. The authors would like to thank Simone Fantoni for his support in multiple point-set registration experiments and Massimiliano Corsini for providing the datasets used in [18]. They also thank Avishek Chatterjee and Venu Madhav Govindu for sharing the MATLAB implementation of [23].

REFERENCES

- [1] *Stanford University 3D Scanning Repository*, <http://graphics.stanford.edu/data/3Dscanrep/>.
- [2] M. AGRAWAL, *A Lie-algebraic approach for consistent pose registration for general Euclidean motion*, in IEEE/RSJ International Conference on Intelligent Robots and Systems, 2006, pp. 1891–1897.
- [3] M. ARIE-NACHIMSON, S. Z. KOVALSKY, I. KEMELMACHER-SHLIZERMAN, A. SINGER, AND R. BASRI, *Global motion estimation from point matches*, in International Conference on 3D Imaging, Modeling, Processing, Visualization and Transmission, IEEE, Washington, DC, 2012, pp. 81–88.
- [4] F. ARRIGONI, A. FUSIELLO, AND B. ROSSI, *On computing the translations norm in the epipolar graph*, in International Conference on 3D Vision, IEEE, Washington, DC, 2015, pp. 300–308, <https://doi.org/10.1109/3DV.2015.41>.
- [5] F. ARRIGONI, B. ROSSI, AND A. FUSIELLO, *Robust and efficient camera motion synchronization via matrix decomposition*, in Image Analysis and Processing – ICIAP 2015, Lecture Notes in Comput. Sci. 9279, V. Murino and E. Puppo, eds., Springer, Bern, 2015, pp. 444–455, <https://doi.org/10.1007/978-3-319-23231-7.40>.
- [6] F. ARRIGONI, B. ROSSI, L. MAGRI, P. FRAGNETO, AND A. FUSIELLO, *Robust absolute rotation estimation via low-rank and sparse matrix decomposition*, in International Conference on 3D Vision, IEEE, Washington, DC, 2014, pp. 491–498, <https://doi.org/10.1109/3DV.2014.48>.
- [7] F. ARRIGONI, B. ROSSI, F. MALAPELLE, P. FRAGNETO, AND A. FUSIELLO, *Robust global motion estimation with matrix completion*, ISPRS - International Archives of the Photogrammetry, Remote Sensing and Spatial Information Sciences, XL-5 (2014), pp. 63–70, <https://doi.org/10.5194/isprsarchives-XL-5-63-2014>.
- [8] C. BELTA AND V. KUMAR, *Euclidean metrics for motion generation on $SE(3)$* , Proc. Inst. Mech. Eng. C J. Mech. Eng. Sci., 216 (2002), pp. 47–60, <https://doi.org/10.1243/0954406021524909>.
- [9] R. BENJEMAA AND F. SCHMITT, *A solution for the registration of multiple 3D point sets using unit quaternions*, in European Conference on Computer Vision, 1998, pp. 34–50, <https://doi.org/10.1007/BFb0054732>.
- [10] F. BERNARD, J. THUNBERG, P. GEMMAR, F. HERTEL, A. HUSCH, AND J. GONCALVES, *A solution for multi-alignment by transformation synchronisation*, in IEEE Conference on Computer Vision and Pattern Recognition, 2015, pp. 2161–2169, <https://doi.org/10.1109/CVPR.2015.7298828>.
- [11] P. BESL AND N. MCKAY, *A method for registration of 3D shapes*, IEEE Trans. Pattern Anal. Mach. Intell., 14 (1992), pp. 239–256.
- [12] M. BRAND, M. ANTONE, AND S. TELLER, *Spectral solution of large-scale extrinsic camera calibration as a graph embedding problem*, in European Conference on Computer Vision, Lecture Notes in Comput. Sci. 3022, Springer, Berlin, 2004, pp. 262–273, <https://doi.org/10.1007/978-3-540-24671-8.21>.
- [13] A. CHATTERJEE AND V. M. GOVINDU, *Efficient and robust large-scale rotation averaging*, in International Conference on Computer Vision, 2013, pp. 521–528, <https://doi.org/10.1109/ICCV.2013.70>.
- [14] D. CRANDALL, A. OWENS, N. SNAVELY, AND D. P. HUTTENLOCHER, *Discrete-continuous optimization for large-scale structure from motion*, in IEEE Conference on Computer Vision and Pattern Recognition, IEEE, Washington, DC, 2011, pp. 3001–3008.
- [15] M. CUCURINGU, Y. LIPMAN, AND A. SINGER, *Sensor network localization by eigenvector synchronization over the Euclidean group*, ACM Trans. Sens. Netw., 8 (2012), 19, <https://doi.org/10.1145/2240092.2240093>.
- [16] Z. CUI, N. JIANG, C. TANG, AND P. TAN, *Linear global translation estimation with feature tracks*, in British Machine Vision Conference, 2015.
- [17] O. ENQVIST, F. KAHL, AND C. OLSSON, *Non-sequential structure from motion*, in Eleventh Workshop on Omnidirectional Vision, Camera Networks and Non-classical Camera, IEEE, Washington, DC, 2011, pp. 264–271, <https://doi.org/10.1109/ICCVW.2011.6130252>.
- [18] S. FANTONI, U. CASTELLANI, AND A. FUSIELLO, *Accurate and automatic alignment of range surfaces*, in International Conference on 3D Imaging, Modeling, Processing, Visualization and Transmission, IEEE, Washington, DC, 2012, pp. 73–80, <https://doi.org/10.1109/3DIMPVT.2012.63>.
- [19] A. FUSIELLO, U. CASTELLANI, L. RONCHETTI, AND V. MURINO, *Model acquisition by registration of multiple acoustic range views*, in European Conference on Computer Vision, Springer-Verlag, London, 2002, pp. 805–822.

- [20] A. GIRIDHAR AND P. R. KUMAR, *Distributed clock synchronization over wireless networks: Algorithms and analysis*, in Proceedings of the 45th IEEE Conference on Decision and Control, 2006, pp. 4915–4920, <https://doi.org/10.1109/CDC.2006.377325>.
- [21] G. H. GOLUB AND C. F. VAN LOAN, *Matrix Computations*, 3rd ed., Johns Hopkins University Press, Baltimore, MD, 1996.
- [22] V. M. GOVINDU, *Combining two-view constraints for motion estimation*, in IEEE Conference on Computer Vision and Pattern Recognition, 2001, pp. 218–225.
- [23] V. M. GOVINDU, *Lie-algebraic averaging for globally consistent motion estimation*, in IEEE Conference on Computer Vision and Pattern Recognition, 2004, pp. 684–691.
- [24] V. M. GOVINDU, *Robustness in motion averaging*, in Proceedings of the Asian Conference on Computer Vision, Springer-Verlag Berlin, Heidelberg, 2006, pp. 457–466, https://doi.org/10.1007/11612704_46.
- [25] V. M. GOVINDU AND A. POOJA, *On averaging multiview relations for 3D scan registration*, IEEE Trans. Image Process., 23 (2014), pp. 1289–1302, <https://doi.org/10.1109/TIP.2013.2246517>.
- [26] R. HARTLEY, K. AFTAB, AND J. TRUMPF, *L1 rotation averaging using the Weiszfeld algorithm*, in IEEE Conference on Computer Vision and Pattern Recognition, 2011, pp. 3041–3048.
- [27] R. I. HARTLEY, J. TRUMPF, Y. DAI, AND H. LI, *Rotation averaging*, Int. J. Comput. Vis., 103 (2013), pp. 267–305, <https://doi.org/10.1007/s11263-012-0601-0>.
- [28] R. I. HARTLEY AND A. ZISSERMAN, *Multiple View Geometry in Computer Vision*, 2nd ed., Cambridge University Press, Cambridge, UK, 2004.
- [29] P. W. HOLLAND AND R. E. WELSCH, *Robust regression using iteratively reweighted least-squares*, Commun. Stat. Theory, 6 (1977), pp. 813–827, <https://doi.org/10.1080/03610927708827533>.
- [30] J. D. HORTON, *A polynomial-time algorithm to find the shortest cycle basis of a graph*, SIAM J. Comput., 16 (1987), pp. 358–366, <https://doi.org/10.1137/0216026>.
- [31] D. Q. HUYNH, *Metrics for 3D rotations: Comparison and analysis*, J. Math. Imaging Vision, 35 (2009), pp. 155–164, <https://doi.org/10.1007/s10851-009-0161-2>.
- [32] N. JIANG, Z. CUI, AND P. TAN, *A global linear method for camera pose registration*, in International Conference on Computer Vision, 2013, pp. 481–488, <https://doi.org/10.1109/ICCV.2013.66>.
- [33] F. KAHL AND R. HARTLEY, *Multiple-view geometry under the l_∞ -norm*, IEEE Trans. Pattern Anal. Mach. Intell., 30 (2008), pp. 1603–1617.
- [34] L. KNEIP, M. CHILI, AND R. SIEGWART, *Robust real-time visual odometry with a single camera and an IMU*, in British Machine Vision Conference, 2011, <https://doi.org/10.5244/C.25.16>.
- [35] S. KRISHNAN, P. Y. LEE, J. B. MOORE, AND S. VENKATASUBRAMANIAN, *Optimisation-on-a-manifold for global registration of multiple 3D point sets*, Int. J. Intell. Syst. Tech. Appl., 3 (2007), pp. 319–340, <https://doi.org/10.1504/IJISTA.2007.014267>.
- [36] D. MARTINEC AND T. PAJDLA, *Robust rotation and translation estimation in multiview reconstruction*, in IEEE Conference on Computer Vision and Pattern Recognition, IEEE, Washington, DC, 2007, pp. 1–8, <https://doi.org/10.1109/CVPR.2007.383115>.
- [37] C. D. MEYER, *Matrix Analysis and Applied Linear Algebra*, SIAM, Philadelphia, 2000.
- [38] P. MOULON, P. MONASSE, AND R. MARLET, *Global fusion of relative motions for robust, accurate and scalable structure from motion*, in International Conference on Computer Vision, IEEE, Washington, DC, 2013, pp. 3248–3255, <https://doi.org/10.1109/ICCV.2013.403>.
- [39] K. NISHINO AND K. IKEUCHI, *Robust simultaneous registration of multiple range images*, in Proceedings of the Asian Conference on Computer Vision, 2002.
- [40] C. OLSSON AND O. ENQVIST, *Stable structure from motion for unordered image collections*, in Proceedings of the 17th Scandinavian Conference on Image Analysis (SCIA11), Springer-Verlag, Berlin, Heidelberg, 2011, pp. 524–535.
- [41] O. OZYESIL AND A. SINGER, *Robust camera location estimation by convex programming*, in IEEE Conference on Computer Vision and Pattern Recognition, IEEE, Washington, DC, 2015, pp. 2674–2683, <https://doi.org/10.1109/CVPR.2015.7298883>.
- [42] O. ÖZYESIL, A. SINGER, AND R. BASRI, *Stable camera motion estimation using convex programming*, SIAM J. Imaging Sci., 8 (2015), pp. 1220–1262, <https://doi.org/10.1137/140977576>.
- [43] X. PENNEC, *Multiple registration and mean rigid shape: Applications to the 3D case*, in 16th Leeds Annual Statistical Workshop, Leeds, UK, 1996, pp. 178–185.

- [44] K. PULLI, *Multiview registration for large data sets*, in International Conference on 3D Digital Imaging and Modeling, IEEE, Washington, DC, 1999, pp. 160–168.
- [45] A. C. RAGHURAMU, *Robust multiview registration of 3D surfaces via ℓ_1 -norm minimization*, in British Machine Vision Conference, 2015, <https://doi.org/10.5244/C.29.62>.
- [46] D. M. ROSEN, C. DUHADWAY, AND J. J. LEONARD, *A convex relaxation for approximate global optimization in simultaneous localization and mapping*, in IEEE International Conference on Robotics and Automation, 2015, pp. 5822–5829, <https://doi.org/10.1109/ICRA.2015.7140014>.
- [47] J. SAUNDERSON, P. A. PARRILO, AND A. S. WILLSKY, *Semidefinite descriptions of the convex hull of rotation matrices*, SIAM J. Optim., 25 (2015), pp. 1314–1343, <https://doi.org/10.1137/14096339X>.
- [48] G. C. SHARP, S. W. LEE, AND D. K. WEHE, *Multiview registration of 3D scenes by minimizing error between coordinate frames*, in European Conference on Computer Vision, 2002, pp. 587–597.
- [49] S. SHIH, Y. CHUANG, AND T. YU, *An efficient and accurate method for the relaxation of multiview registration error*, IEEE Trans. Image Process., 17 (2008), pp. 968–981.
- [50] A. SINGER, *Angular synchronization by eigenvectors and semidefinite programming*, Appl. Comput. Harmon. Anal., 30 (2011), pp. 20–36, <https://doi.org/10.1016/j.acha.2010.02.001>.
- [51] A. SINGER AND Y. SHKOLNISKY, *Three-dimensional structure determination from common lines in cryo-tem by eigenvectors and semidefinite programming*, SIAM J. Imaging Sci., 4 (2011), pp. 543–572, <https://doi.org/10.1137/090767777>.
- [52] N. SNAVELY, S. M. SEITZ, AND R. SZELISKI, *Photo tourism: Exploring photo collections in 3D*, ACM Trans. Graph., 25 (2006), pp. 835–846, <https://doi.org/10.1145/1141911.1141964>.
- [53] C. STRECHA, W. VON HANSEN, L. J. VAN GOOL, P. FUA, AND U. THOENNESSEN, *On benchmarking camera calibration and multi-view stereo for high resolution imagery*, in IEEE Conference on Computer Vision and Pattern Recognition, 2008, pp. 1–8, <https://doi.org/10.1109/CVPR.2008.4587706>.
- [54] J. THUNBERG, F. BERNARD, AND J. GONCALVES, *On Transitive Consistency for Linear Invertible Transformations between Euclidean Coordinate Systems*, preprint, <https://arxiv.org/abs/1509.00728>, 2015.
- [55] R. TOLDO, A. BEINAT, AND F. CROSILLA, *Global registration of multiple point clouds embedding the generalized Procrustes analysis into an ICP framework*, in International Symposium on 3D Data Processing, Visualization, and Transmission, 2010.
- [56] R. TOLDO, R. GHERARDI, M. FARENZENA, AND A. FUSIELLO, *Hierarchical structure-and-motion recovery from uncalibrated images*, Comput. Vis. Image Und., 140 (2015), pp. 127–143, <https://doi.org/10.1016/j.cviu.2015.05.011>.
- [57] A. TORSSELLO, E. RODOLA, AND A. ALBARELLI, *Multiview registration via graph diffusion of dual quaternions*, in IEEE Conference on Computer Vision and Pattern Recognition, IEEE, Washington, DC, 2011, pp. 2441–2448, <https://doi.org/10.1109/CVPR.2011.5995565>.
- [58] R. TRON, L. CARLONE, F. DELLAERT, AND K. DANILIDIS, *Rigid components identification and rigidity enforcement in bearing-only localization using the graph cycle basis*, in IEEE American Control Conference, IEEE, Washington, DC, 2015, pp. 3911–3918.
- [59] R. TRON AND K. DANILIDIS, *Statistical pose averaging with varying and non-isotropic covariances*, in European Conference on Computer Vision, 2014, pp. 804–819.
- [60] R. TRON AND R. VIDAL, *Distributed 3-D localization of camera sensor networks from 2-D image measurements*, IEEE Trans. Automat. Control, 59 (2014), pp. 3325–3340, <https://doi.org/10.1109/TAC.2014.2351912>.
- [61] G. WAHBA, *A least squares estimate of satellite attitude*, SIAM Rev., 7 (1965), p. 409, <https://doi.org/10.1137/1007077>.
- [62] L. WANG AND A. SINGER, *Exact and stable recovery of rotations for robust synchronization*, Information and Inference, 2 (2013), pp. 145–193, <https://doi.org/doi:10.1093/imaiai/iat005>.
- [63] W. WHITELEY, *Matroids from discrete geometry*, in Matroid Theory, Contemporary Mathematics, J. Bonin, J. Oxley, and B. Servatius, eds., AMS, Providence, RI, 1997, pp. 171–313, <https://doi.org/10.1990/conn/197/05240>.
- [64] K. WILSON AND N. SNAVELY, *Robust global translations with 1DSfM*, in European Conference on Computer Vision, 2014, pp. 61–75, https://doi.org/10.1007/978-3-319-10578-9_5.

- [65] C. ZACH, M. KLOPSCHITZ, AND M. POLLEFEYS, *Disambiguating visual relations using loop constraints*, in IEEE Conference on Computer Vision and Pattern Recognition, IEEE, Washington, DC, 2010, pp. 1426–1433, <https://doi.org/10.1109/CVPR.2010.5539801>.
- [66] S. ZHAO AND D. ZELAZO, *Localizability and distributed protocols for bearing-based network localization in arbitrary dimensions*, Automatica J. IFAC, 69 (2016), pp. 334–341, <https://doi.org/10.1016/j.automatica.2016.03.010>.